


*Introducing CRxVision™ from GE: A High-Resolution
CR Scanner for Weld and General Purpose Inspections*



CRxVision

Packed with innovative features to increase throughput, extend plate life and provide excellent image quality, the CRxVision is designed specifically for the inspection of welds. The scanner is developed to cover the stringent ISO 17636-2 Class A and B requirements, as well as ASTM, ASME and EN weld standards. Because of its versatility, it can also be used for many other applications across the NDT industry.

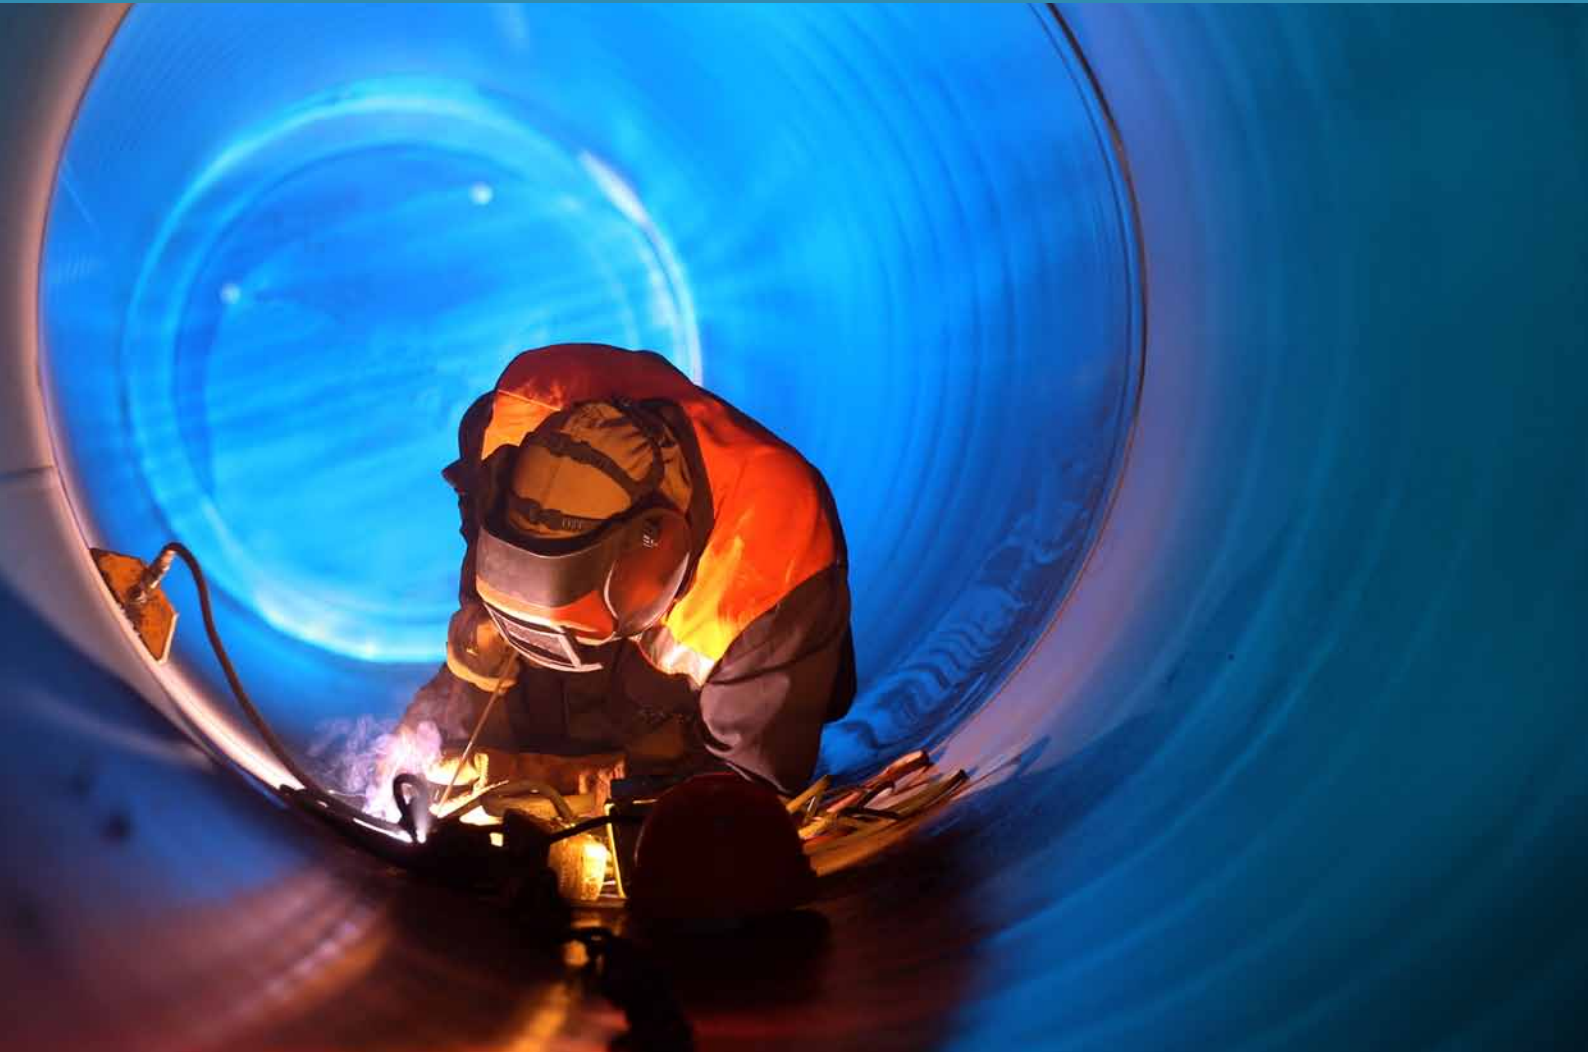

GE imagination at work

CRxVision: the versatile, new tabletop scanner from GE.

Flexible

accepting a wide range of sizes, shapes and classes of imaging plates

Intuitive

no gain setting or photomultiplier adjustments required when exposing various thicknesses

Fast


multiple plate scanning option: side-by-side and back-to-back with a flat transport path

High Resolution

new laser optics for profound reading and higher data extraction

Extended Plate Life

no mechanical handling of the imaging plate during scanning and erasing

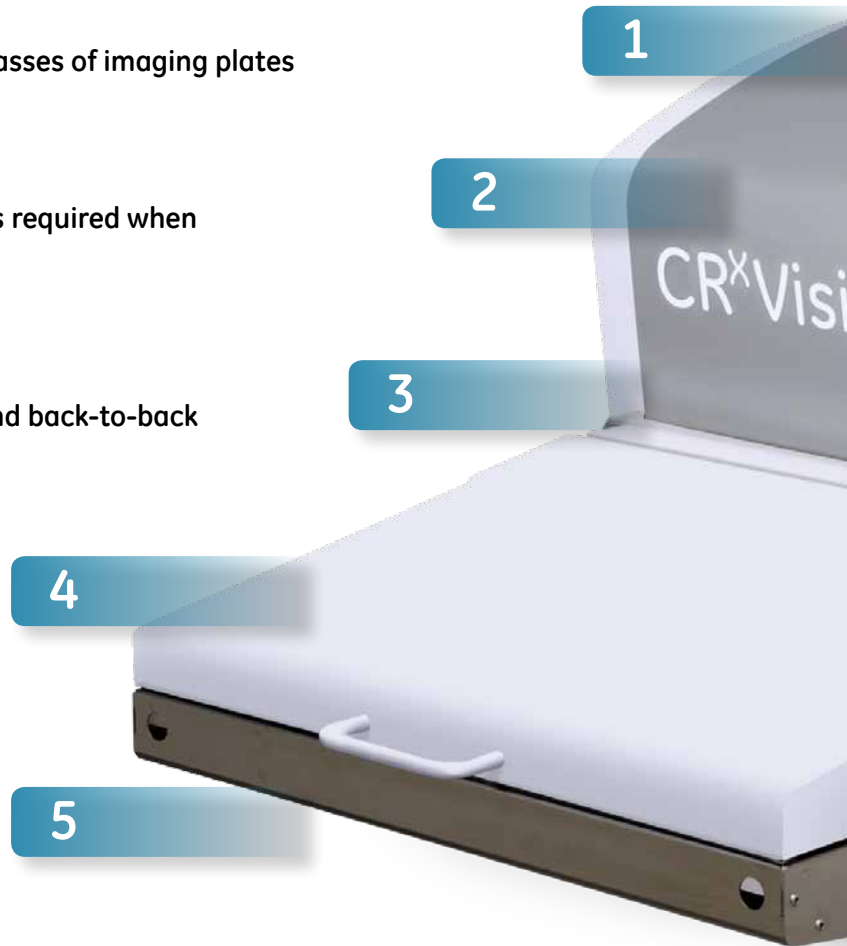

Your Benefits:

— **Compliant** to ISO 17636-2 Class A and B, ASME, ASTM and EN **weld inspection standards**.

— The CRxVision has an **extremely wide latitude** eliminating the need for multiple gain settings when exposing over a wide range of thicknesses. This is the result of a 16 bit image processing at selectable **35 or 70 microns resolution**.

— **Exposure times** for welds are equal or better than existing film exposure times (to comply with Code Standards like EN and ASME) and can be reduced by up to ten times for non-code type applications like erosion/corrosion or valve placement.

— Designed for extremely **high throughput**: 90 plates/hr at 70 microns or 28 plates/hr at 35 microns for a 10 x 40 cm (4.5 x 17") plate. The scanner allows multiple imaging plates to be scanned simultaneously ... side-by-side and back-to-back as well as various lengths to be scanned together. This is a result of the straight and flat, in-line scan and erase transport path.

— Ability to scan **any shape or size of imaging plate** from 20 to 1500 mm (0.75 to 60") in length. Imaging plates can be exposed in any type of cassette, then simply removed and inserted directly into the scanner without the need of

any type of adapter, template or leader.

— A new **innovative imaging plate design** now provides the GE CRxVision imaging plates with more flexibility. This new design allows each imaging plate the ability to return to a flat state after being constantly bent around pipes for the inspection of welds. This feature also helps **improve productivity** by allowing the imaging plates to be easily extracted and reinserted into cassettes.

— Plate transport through the scanners is achieved by a **magnetic transportation system**. This new combination of scanner and imaging plate design allows the



6

ASTM DICONDE Compliant
fully compatible with GE's existing
Rhythm Software Platform

7

Ambient Operation
cover protects the imaging plate
from light exposure

8

Direct Laser Contact
the laser beam is in direct contact
with the imaging plate (no glass to
obscure data collection)

imaging plate to be transported through the scanner without any mechanical handling of the phosphor ultimately extending the overall life of the plate.

— The updated Rhythm RT software simplifies inspection workflow. It now has the ability to **automatically crop the images** by detecting the physical edges of each individual plate when they are processed. Consequently, each individual plate can be separately identified and saved or grouped together and saved as one file.

— The new scanner enjoys all the functionality offered by GE's Rhythm Software giving the inspector the ability

to view, enhance, measure, annotate and comment on the images. The CRxVision system is completely **DICONDE compliant** and compatible with all existing modules in GE's Rhythm Software platform.

— The CRxVision can be used in **ambient light conditions** with suitable handling as the light cover protects the plates from light exposure during the scan cycle. The cover can be removed for work in darkrooms if required.

— The scanner weighs **less than 45 kg** (99 lbs) and has a footprint of 560 x 560 mm (22 x 22 inches). It extends to 560 x 1280 mm (22 x 50 inches) when the feed and exit

tables are attached.

— The light guide can be easily cleaned with an internal brush which is operated by simply turning a set screw. The eraser section of the scanner is **completely sealed** from the optics section to prevent migration of any dust particles into the machine.



Applications




Even though the CRxVision was designed for the inspection of welds, it also has the ability to cover a wide range of industrial radiography applications, from Oil & Gas to Aerospace, and from Power Generation to General NDT.

- Weld inspection
- Erosion/Corrosion inspection (CUI, FAC, etc.)
- Castings (In-process and final)
- Valve positioning
- Concrete and Structure inspection
- Government (Arsenals, National Laboratories, Proving Grounds)
- Military (in-service aircraft, ships, etc.)



In all applications the CRxVision offers the following significant benefits of digital radiography:

- No darkroom facilities/trucks needed
- Eliminate processing chemicals and chemical disposal/silver recovery
- Improved image interpretation and inspection quality level with Flash!Filters™
- Consistent & operator-independent results with the Automated WT Measurement tool
- High reduction in retakes due to the wide dynamic range of the imaging plates
- No development time, as images are immediately available after scanning
- High reduction in storage space when archiving digital images
- Data management (trending) and data sharing advantages
- Fully DICOM compliant

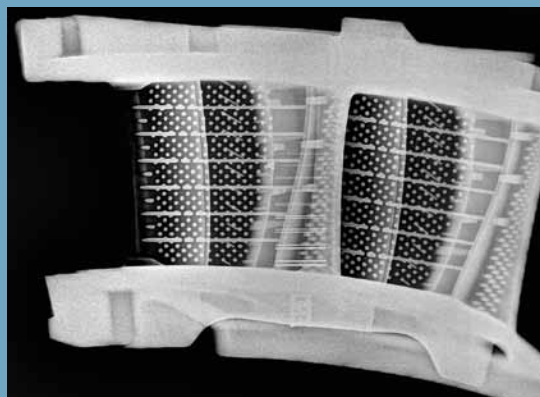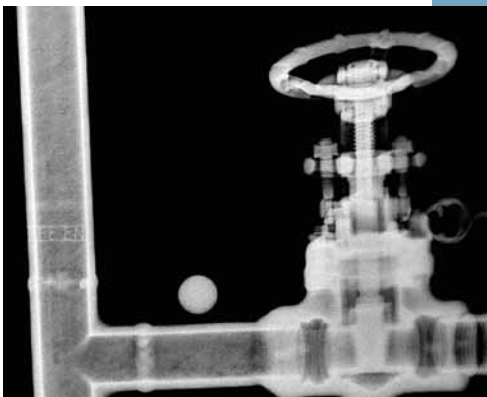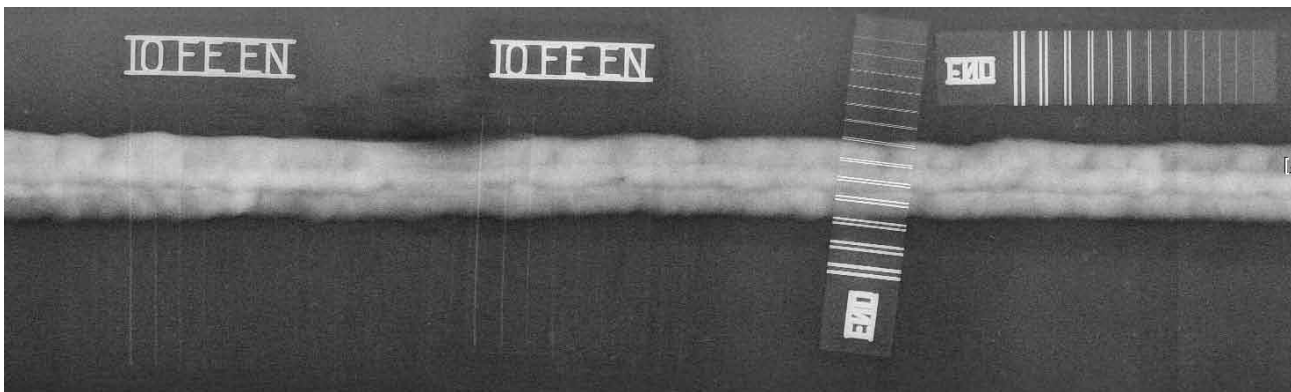



Rhythm RT for Workflow Optimization

GE's Rhythm RT is a powerful, ASTM DICONDE compliant operational software platform, which simplifies the overall inspection workflow.

After entering the component and technique data, select the required scan resolution and insert the imaging plate. Once the imaging plate is scanned, the image will appear and any Region of Interest (ROI) may then be identified on the computer screen


and enhancements, annotations and measurements applied. The image can then be saved for further review and/or storage. The files can be saved in TIFF, BMP, JPEG, and/or DICONDE formats.

Rhythm RT workflow

- 1 Enter the component and technique information



- 2 Select the required resolution

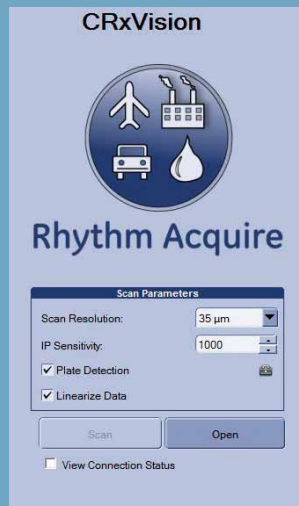


- 3 Insert the imaging plate(s) to start the cycle




- 4 Press scan



- 5 Select a specific ROI (if desired)

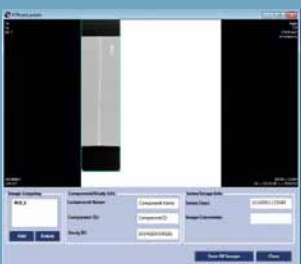

- 6 Send image to review

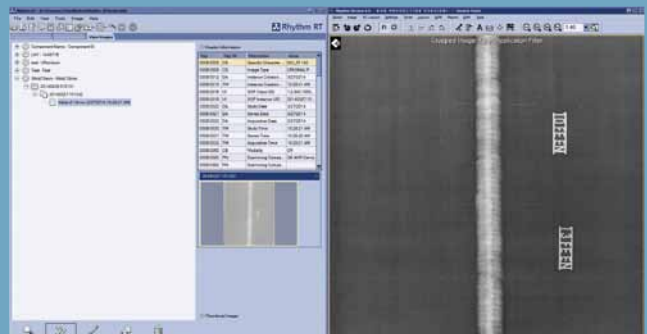

Imaging Plates

Three different types of imaging plates with a ferromagnetic back layer have been developed specifically for the CRxVision. This allows the imaging plates to be magnetically transported through the scanner with no phosphor touch points. In addition, this new design helps reduce backscatter which improves the overall quality of the image as well as allows the imaging plate the ability to return to a flat position after being constantly bent around curved objects.

GE's three imaging plate types are as follows:

- **IPC2:** Standard Resolution & High Speed - for general purpose
- **IPS:** High Resolution & Medium Speed - for inspection of welds
- **IPU:** Extreme High Resolution & Slow Speed - for extremely high resolution applications when very low micron range sensitivity is required.

Plates are available in various size formats ranging from 70 mm (2.76") wide to 1500 mm (60") in length.

Protective Cassettes

A range of flexible and hard cassettes are also available. Both versions may be supplied with or without lead, depending on the application.



Technical Specifications of CRxVision

Functional Data		
Principle	High performance table-top flatbed scanner with contactless plate transport	
Eraser	Inline	
Resolution	Standard resolution (SR)	70 µm
	High resolution (HR)	35 µm
Maximum basic	Standard resolution (SR)	80 µm (6,25 LP / mm)
Spatial resolution	High resolution (HR)	40 µm (12,5 LP / mm)
Scan width	35 cm (14 inch)	
Throughput (10 x 40 cm 4.5 x 17")	Standard resolution (SR)	90 plates/hour
	High resolution (HR) @ 35 µm	28 plates/hour (single IP entry) 84 plates/hour (3 IPs entry)
Time to image (in Rhythm RT)	Standard resolution (SR)	40 sec
	High resolution (HR)	147 sec
LUT (look up table)	Linear	
	(native Square root)	
Bit depth	16 Bit	
Dimensions	Scanner	56 x 56 x 47 cm (22" x 22" x 19")
	Scanner including I/O table and light cover	128 x 56 x 47 cm (52" x 22" x 19")
Weight	Scanner	45 kg (99 lbs)
	Scanner including I/O table and light cover	50 kg (110 lbs)
Interfaces	Ethernet, RJ45	
	DC voltage, coded 8-pin, female	
Certifications	CE, UL (NRTLus), cUL (cNRTLus), C-Tick, Customs Union Mark	

Environmental Conditions		
Operation	Temp. allowed	15 °C to 35 °C (59 °F to 95 °F)
	Relative humidity	15% to 80% (non condensed)
	Magnetic field	Compliant with EN 61000-4-8, Level 2
Transport	IEC721-3-2 (1997): class 2K2 and 2M3, with following restrictions	
	Temperature	-25 °C to +55 °C (-13 °F to 131 °F)
	Vibration	5 to 200 Hz (vertical, longitudinal, transversal axis)
Mechanical conditions for transport	In packaging	IEC 721-3-2 (1997): class 2M2
Shock specifications	In packaging	IEC TR 60721-4-5 (1997): class 5M2

Electrical Data

Operating voltage	Auto-ranging external power supply from 100 V to 240 V, DC Output 24V	
Mains frequency		50/60 Hz
Mains fuse protection	Europe	min. 10 A, max. 16 A
	USA & Japan	min. 10 A, max. 15 A
Power consumption	Standby 110 V - 240 V / 50-60 Hz	max. 22 W
	During operation 110 V - 240 V / 50-60 Hz	max. 140 W (absolute peak)

Application Compliance

ASME	ASME Code Section V Article 2	
ISO 17636-2	Class A / Class B (in defined exposure conditions)	Verified with X-ray, Ir-192, Se-75, Co-60
EN14784-1	IPS: 1/80, IPU: 1/40	Certified by BAM
EN2446-06	IPS: S/80, IPU: S/40	Certified by BAM

Accessories


I/O Table with light cover	Quick mountable, stainless steel, input/output table set with 43 cm (17") tray length and light cover for input side	
Long I/O table	Input/output extension for long plates scanning 150 cm (59")	
Flight Case	Robust Flight Case with shock-absorbers, wheels, ruggedized handles and compartments for I/O tables, laptop, accessories	

Imaging Plates

IPC2	High speed plate	Use: CRxVision can scan any shape or size imaging plate from 20 to 1500 mm (0.75 to 60") in length.
IPS	High resolution	
IPU	Extremely high resolution (X-ray)	

Cassettes

Flexible cassettes	PVC or vinyl envelopes	different sizes
Hard cassettes (for defined exposure conditions)	35 x 43 cm, 20 x 24 cm, 24 x 30 cm, 15 x 30 cm 14" x 17", 8" x 10", 10" x 12", 6" x 12"	

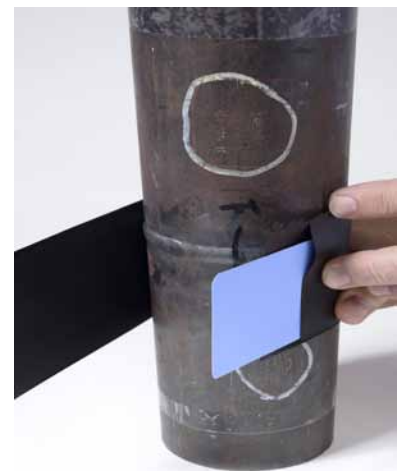

Regional Offices

Europe

Germany

Niels-Bohr-Str. 7
31515 Wunstorf
P.O. Box 6241
31510 Wunstorf
+49 5031 172 0

Bogenstr. 41
22926 Ahrensburg
+49 4102 807 117
xray.info@ge.com

Belgium

Roderveldlaan 5
2600 Berchem
+32 3 456 2820

United Kingdom

Unit 6, Pear Tree Business Park
Desford Lane
Ratby LE6 0LE
+44 (0)77 6890 5901

France

68, Chemin des Ormeaux
Limonest 69760
+33 47 217 9216

Spain

San Maximo, 31, Planta 4A, Nave 6
Madrid 28041
+34 915 500 59 90

Americas

United States

50 Industrial Park Road
Lewistown, PA 17044
+1 866 243 2638 (toll free)
+1 717 242 0327
xray.info@ge.com

201 Beltway Green
Pasadena, Texas 77503
+1 855 232 7470

Brazil

Av. Maria Coelho Aguiar, 215
Building C, 6th floor
Jd. Sao Luiz - Sao Paulo - SP
CEP 05804-900 - Brazil
+55 11 3614-1840

Asia

China

5F, Building 1, No.1 Huatuo Road,
Zhangjiang High-Tech Park,
Shanghai 201203
+86 800 915 9966 (toll-free)
+86 (0) 21-3877 7888

Unit 1602, 16/F Sing Pao Building
101 King's Road
North Point
Hong Kong
+852 2877 0801

Japan

Harumi Island Triton Square Office Tower X
1-8-10, Harumi, Chuo-ku, Tokyo 104-6023
Tel: +81 3 6890 4567
Fax: +81 3 6864 1738

GE has sales and service offices all over the world.
Below are some of our locations. Visit www.ge-mcs.com for a complete listing.

- Alzenau, Germany
- Burford, United Kingdom
- Moscow, Russia
- Bucharest, Romania
- Prague, Czech Republic
- Stockholm, Sweden
- Milan, Italy
- East Perth, Australia
- Singapore
- Dubai, UAE
- Buenos Aires, Argentina
- Mexico City, Mexico
- Airdrie, Alberta, Canada
- Toronto, Ontario, Canada
- Montreal, Quebec, Canada



www.gemeasurement.com/x-ray
xray.info@ge.com